

Модуль DWDM SFP28, 10km, CH-17 - CH-60**Особенности:**

- DWDM EML передатчик
- C-Band 100GHz DWDM ITU Grid
- передача данных до 25.78Gbps
- рассеиваемая мощность < 2Вт
- Dispersion tolerance from -170ps/nm to 170ps/nm
- поддержка горячей замены
- соответствие спецификации на SFP28 MSA SFF-8402
- встроенный CDR (clock and data recovery) и DDMI

Области применения:

- 25GB Ethernet

Part No.	Data Rate	Laser	Power budget	Case Temp.	CDR	DDMI
SFP28-DWDM-Cxx-10	25.78Gbps	DWDM EML	7dB	0°C ~+70°C	Yes	Yes

Длины волн и модели:

Channel	Model	Frequency (THz)	Center Wavelength (nm)
17	SFP28-DWDM-C17-10	191.7	1563.86
18	SFP28-DWDM-C18-10	191.8	1563.05
19	SFP28-DWDM-C19-10	191.9	1562.23
20	SFP28-DWDM-C20-10	192.0	1561.42
21	SFP28-DWDM-C21-10	192.1	1560.61
22	SFP28-DWDM-C22-10	192.2	1559.79
23	SFP28-DWDM-C23-10	192.3	1558.98
24	SFP28-DWDM-C24-10	192.4	1558.17
25	SFP28-DWDM-C25-10	192.5	1557.36
26	SFP28-DWDM-C26-10	192.6	1556.55
27	SFP28-DWDM-C27-10	192.7	1555.75
28	SFP28-DWDM-C28-10	192.8	1554.94
29	SFP28-DWDM-C29-10	192.9	1554.13
30	SFP28-DWDM-C30-10	193.0	1553.33
31	SFP28-DWDM-C31-10	193.1	1552.52
32	SFP28-DWDM-C32-10	193.2	1551.72
33	SFP28-DWDM-C33-10	193.3	1550.92
34	SFP28-DWDM-C34-10	193.4	1550.12
35	SFP28-DWDM-C35-10	193.5	1549.32
36	SFP28-DWDM-C36-10	193.6	1548.51
37	SFP28-DWDM-C37-10	193.7	1547.72

38	SFP28-DWDM-C38-10	193.8	1546.92
39	SFP28-DWDM-C39-10	193.9	1546.12
40	SFP28-DWDM-C40-10	194.0	1545.32
41	SFP28-DWDM-C41-10	194.1	1544.53
42	SFP28-DWDM-C42-10	194.2	1543.73
43	SFP28-DWDM-C43-10	194.3	1542.94
44	SFP28-DWDM-C44-10	194.4	1542.14
45	SFP28-DWDM-C45-10	194.5	1541.35
46	SFP28-DWDM-C46-10	194.6	1540.56
47	SFP28-DWDM-C47-10	194.7	1539.77
48	SFP28-DWDM-C48-10	194.8	1538.98
49	SFP28-DWDM-C49-10	194.9	1538.19
50	SFP28-DWDM-C50-10	195.0	1537.40
51	SFP28-DWDM-C51-10	195.1	1536.61
52	SFP28-DWDM-C52-10	195.2	1535.82
53	SFP28-DWDM-C53-10	195.3	1535.04
54	SFP28-DWDM-C54-10	195.4	1534.25
55	SFP28-DWDM-C55-10	195.5	1533.47
56	SFP28-DWDM-C56-10	195.6	1532.68
57	SFP28-DWDM-C57-10	195.7	1531.90
58	SFP28-DWDM-C58-10	195.8	1531.12
59	SFP28-DWDM-C59-10	195.9	1530.33
60	SFP28-DWDM-C60-10	196.0	1529.55

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _s	-45	85	°C
Supply Voltage	V _{CC}	-0.5	3.6	V
Operating Relative Humidity	RH	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T _A	0		70	°C
Power Supply Voltage	V _{CC}	3.15		3.45	V
Power Supply Current	I _{CC}			606	mA

Performance Specifications - Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Transmitter						
CML Inputs(Differential)	Vin	40		1000	mVpp	AC coupled input*
Input Impedance (Differential)	Zin		100		ohm	Rin > 100 kohm @ DC
TX_Dis	Disable	2		Vcc+0.3	V	
	Enable	0		0.8		
TX_FAULT	Fault	2		Vcc+0.3	V	
TX_FAULT	Normal	0		0.8	V	
Receiver						
CML Outputs (Differential)	Vout	450		1050	mVpp	AC coupled output*
Output Impedance (Differential)	Zout	85	100	115	ohm	
RX_LOS	LOS	2		Vcc+0.3	V	
RX_LOS	Normal	0		0.8	V	

Optical Characteristics



Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Center Wavelength Spacing			100		GHz
Center Wavelength Spacing			0.8		nm
Side Mode Suppression Ratio	SMSR	30			dB
Average Output Power@25.78Gb/s*	Pout	-3		2	dBm
Extinction Ratio	ER	3			dB
Receiver					
Receiver Sensitivity@25.78Gb/s*	Pmin			-10	dBm
Receiver Overload	Pmax	2			dBm
LOS De-Assert	LOSD			-17	dBm
LOS Assert	LOSA	-30			dBm
LOS Hysteresis	Hy	0.5			dB
Optical Signal To Noise Ratio Tolerance	OSNR	33			dB

Note4: CML logic, internally AC coupled.

Note5 : Output is coupled into a 9/125µm single -mode fiber.

Note6: Minimum average optical power measured at the BER less than 5E-5. The measure pattern is PRBS 2 -1.

SFP28 Transceiver Electrical Pad Layout

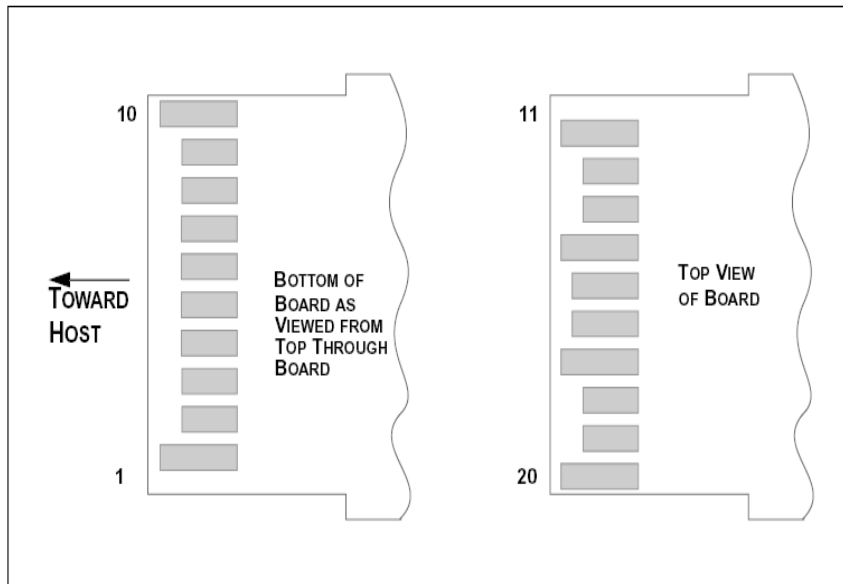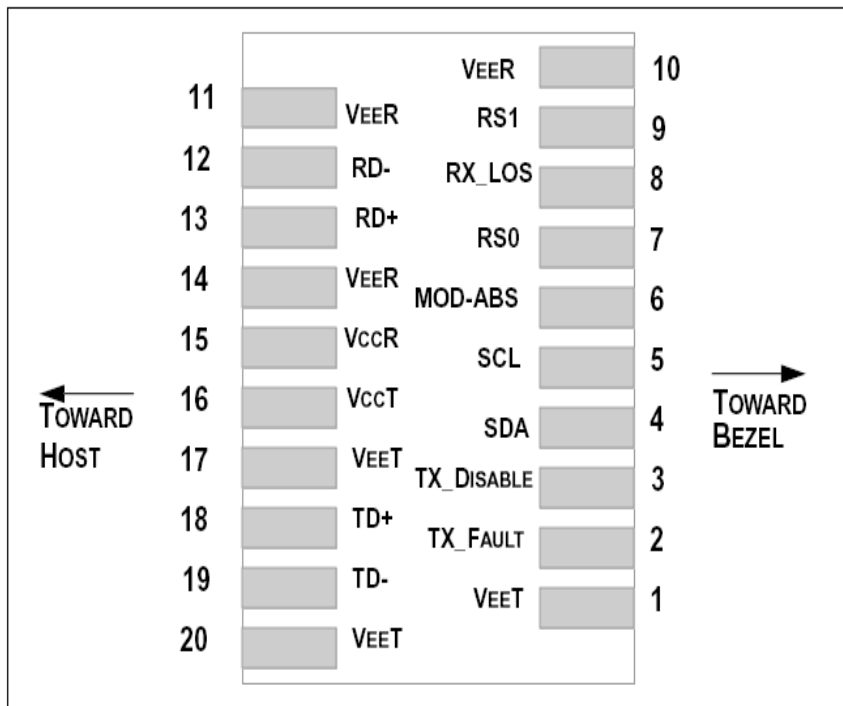


Pin Function Definitions

Pin Num.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2, Module disables on high or open
4	SDA	Module Definition 2	3	Data line for Serial ID.
5	SCL	Module Definition 1	3	Clock line for Serial ID.
6	MOD-ABS	Module Definition 0	3	Note 3
7	RS0	RX Rate Select (LVTTTL).	3	Rate Select 0, optionally controls SFP28 module receiver. This pin is pulled low to VeeT with a >30K resistor..
8	LOS	Loss of Signal	3	Note 4
9	RS1	TX Rate Select (LVTTTL).	1	Rate Select 1, optionally controls SFP28 module transmitter. This pin is pulled low to VeeT with a >30K resistor.
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD-	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	Note 6
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3V ± 5%, Note 7
16	VccT	Transmitter Power	2	3.3V ± 5%, Note 7
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	Note 8
19	TD-	Inv. Transmit Data In	3	Note 8
20	VeeT	Transmitter Ground	1	Note 5

Notes:

- 1) TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10K Ω resistor on the host board. Pull up voltage between 2.0V and $V_{ccT/R}+0.3V$. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7K~10 K Ω resistor. Its states are:
Low (0 – 0.8V): Transmitter on (>0.8, < 2.0V): Undefined
High (2.0 – 3.465V): Transmitter Disabled Open: Transmitter Disabled
- 3) Module Absent, connected to VeeT or VeeR in the module.
- 4) LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10K Ω resistor. Pull up voltage between 2.0V and V_{cc_Host} . When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- 5) VeeR and VeeT may be internally connected within the SFP28 module.
- 6) RD-/+ : These are the differential receiver outputs. They are AC coupled 100 Ω differential lines which should be terminated with 100 Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 185 and 425 mV differential (92.5 –212.5 mV single ended) when properly terminated.
- 7) VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V \pm 5% at the SFP+ connector pin. Maximum supply current is 340mA. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP28 input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP28 transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP28 transceiver module.
- 8) TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 90 – 800 mV (45 – 400 mV single-ended), though it is recommended that values between 90 and 800 mV differential (45 – 400 mV single-ended) be used for best EMI performance.

Mechanical Specifications

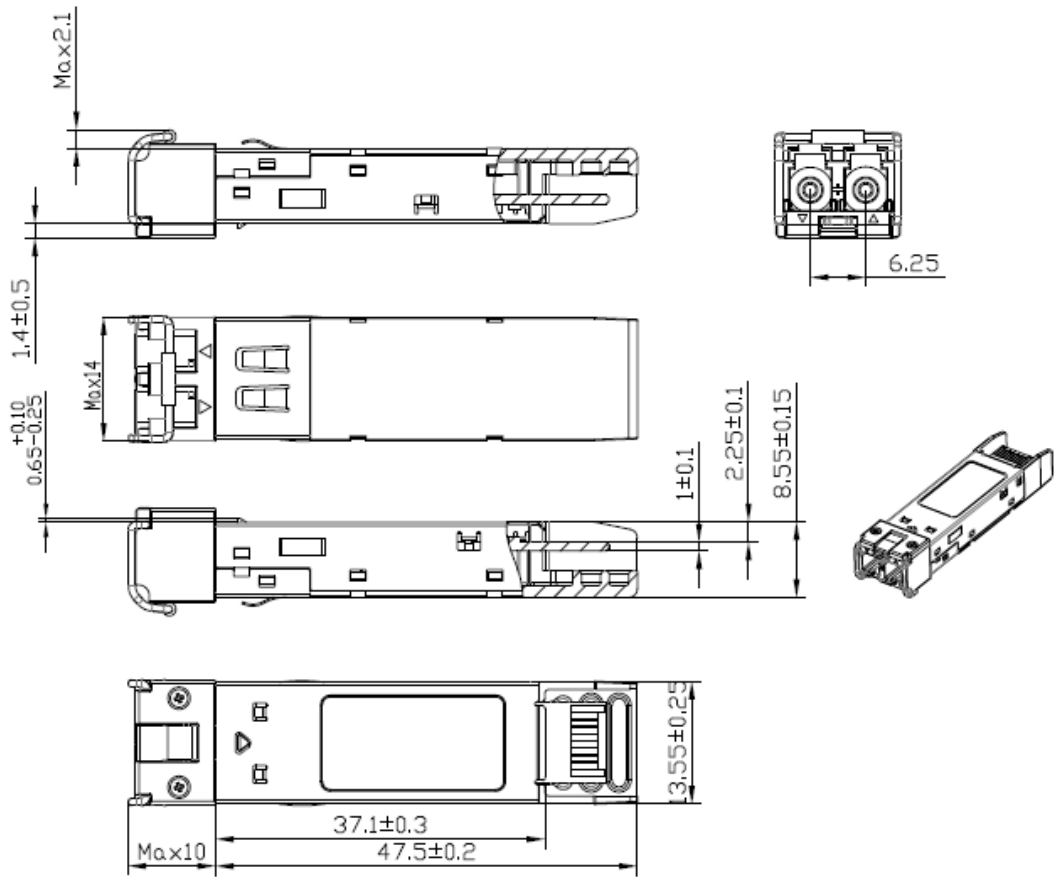

Unremarked tolerances ±0.2mm