


DWDM мультиплексор/демультиплексор, 8 каналов, 1529.55нм - 1535.04нм, LC

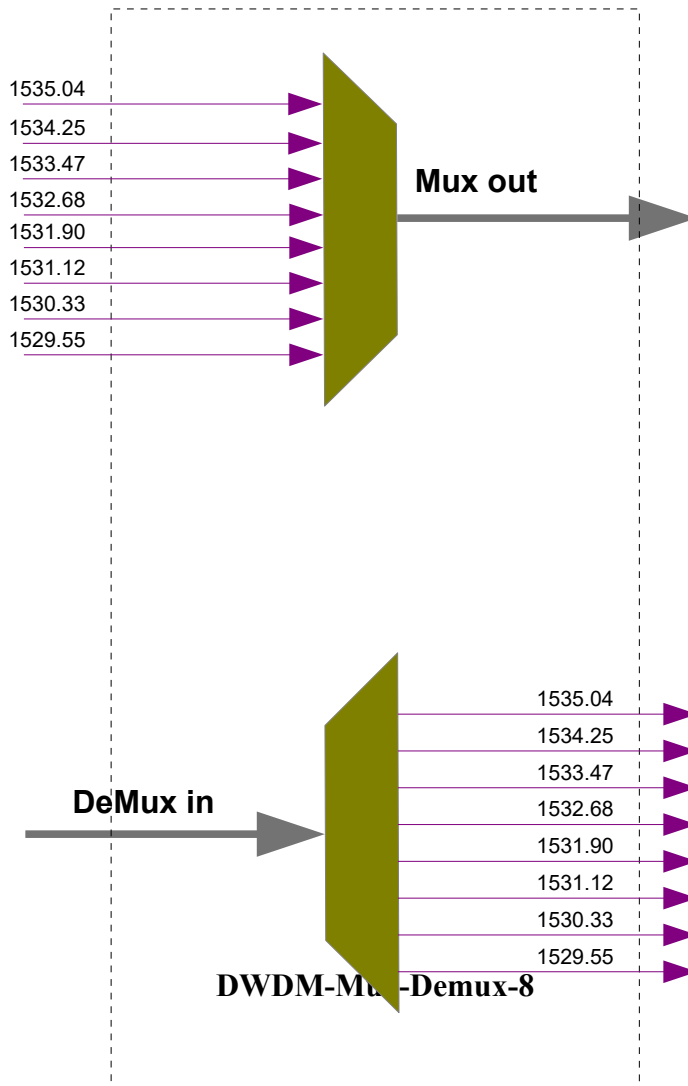

Технические характеристики:

Parameter	
Operating Wavelength (Mux)	1535.04, 1534.25, 1533.47, 1532.68, 1531.90, 1531.12, 1530.33, 1529.55
Operating Wavelength (DeMux)	1535.04, 1534.25, 1533.47, 1532.68, 1531.90, 1531.12, 1530.33, 1529.55
Channel Number	16 (8 duplex) Channel, 8 wavelengths. ITU 100 GHz Grid, C60-

	C53 channels
Fiber Type	SM ITU-T G.655/G.652
Channel spacing	0.8nm
Center Wavelength Accuracy	±0.05 nm
Bandwidth @ -0.5dB	≥ 0.22
Insertion Loss	≤ 2.8 dB
Channel Uniformity (dB)	≤ 1.0 dB
Isolation Adjacent (dB)	25 dB
Isolation Non-adjacent (dB)	35 dB
Insertion Loss Temperature Sensitivity (dB/°C)	≤ 0.005
Wavelength Temperature Shifting(nm/°C)	≤ 0.002
Polarization Dependent Loss (dB)	≤ 0.15
Polarization Mode Dispersion (ps)	≤ 0.1
Directivity (dB)	≥ 50
Return Loss (dB)	≥ 45
Optical Power Handling	≥ 300 mW
Operating Temperature	0 to +60°C
Storage Temperature	-30 to +85°C
Connector Type	9 pcs LC/UPC duplex adaptors
Packaging Dimension	19" 1U-height Patch panel type