


REV	PN	DATE
1	C-MPO-4xLC-OM3-8F-xxM	2023.09.20

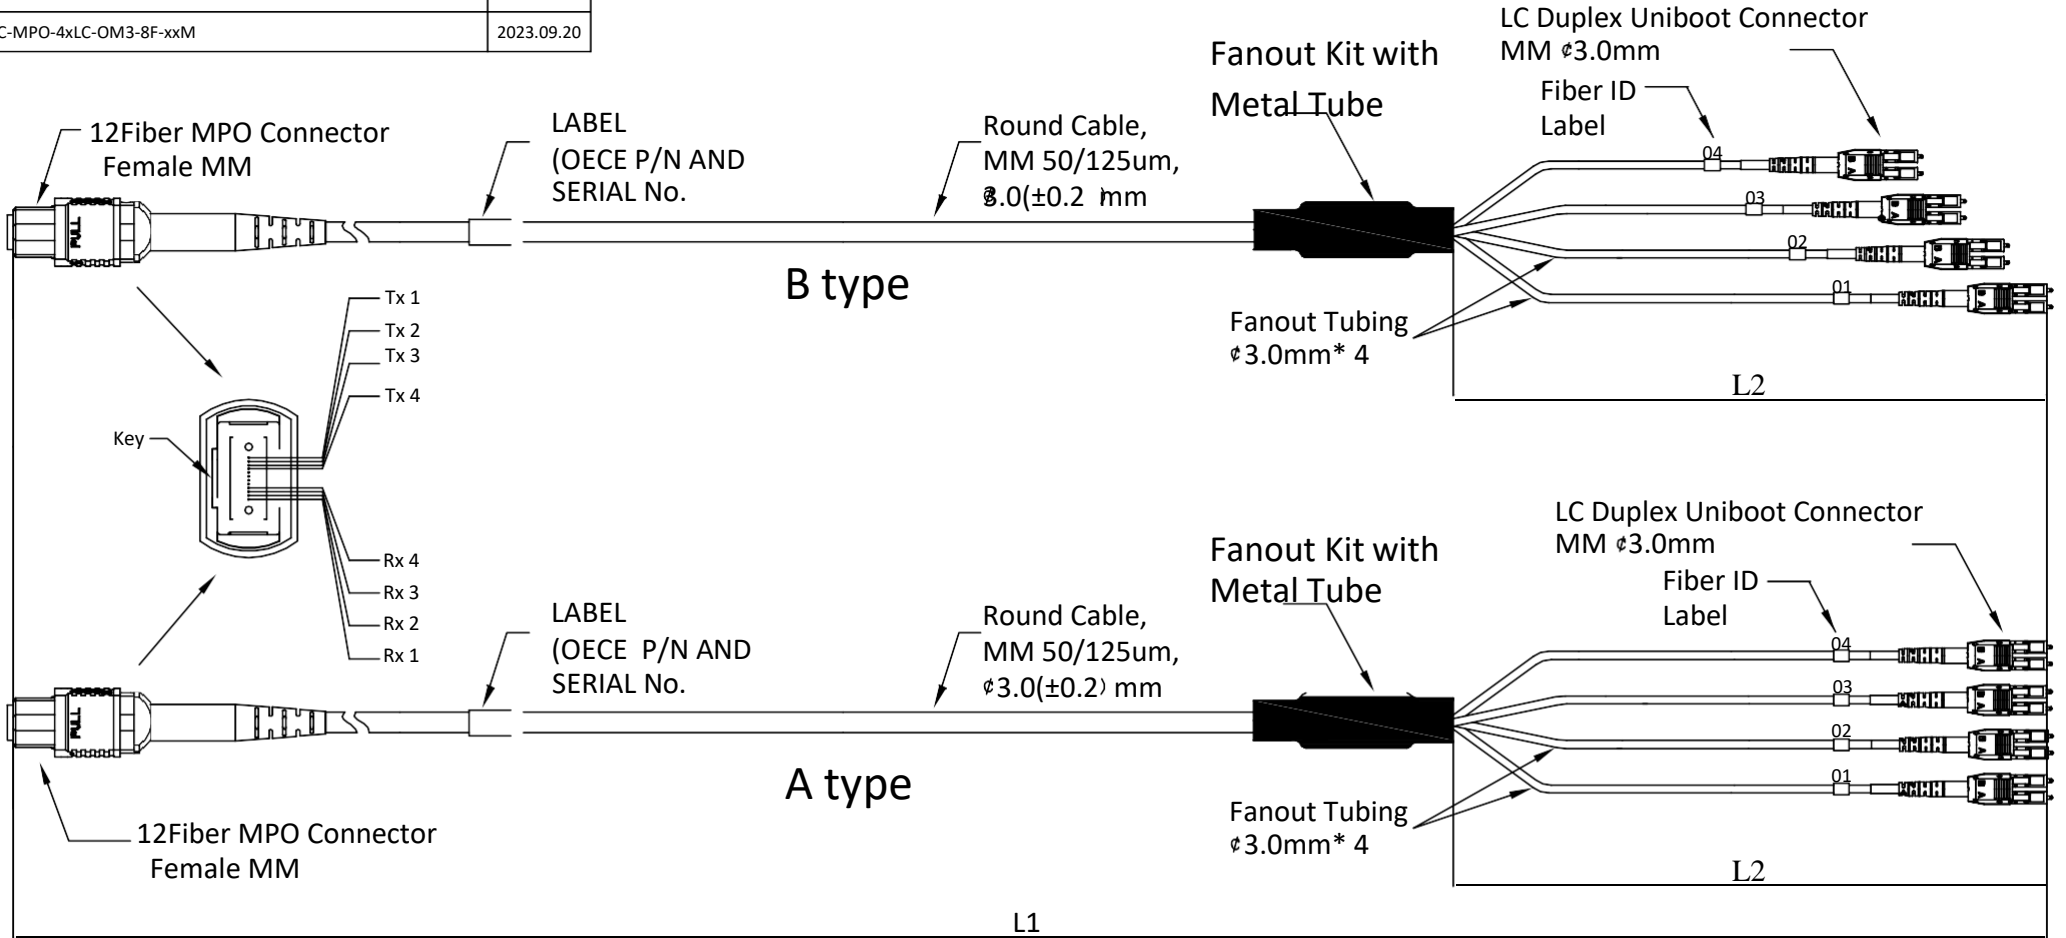

MPO	Fiber Color	LC
Rx 1	Blue	1 B
Rx 1	Orange	2 B
Rx 1	Green	3 B
Rx 1	Brown	4 B
UNUSED	UNUSED	UNUSED
UNUSED	UNUSED	UNUSED
UNUSED	UNUSED	UNUSED
UNUSED	UNUSED	UNUSED
Tx 4	Yellow	4 A
Tx 3	Violet	3 A
Tx 2	Rose	2 A
Tx 1	Aqua	1 A

**Notes:**  
 Insertion Loss:  
 MPO < 0.7dB (standard Loss);  
 MPO < 0.3dB (Low Loss);  
 LC < 0.15dB ;  
 Return Loss: 20dB Min

<b>Optiset</b> QSFP to SFP (MPO to 4*LC/Duplex) Optical Cable Assemblies			Cable Type	Cable DIA.(mm)
Model	Type	L2		
C-MPO-4xLC-OM3-8F-xxM	A	0.5M	OM3	3.0 ± 0.2
" xx ":Cable Overall Length (m)				

**Mechanical Specifications:**  
 \* Maximum Tensile Load : 300N  
 \* Minimum Band Radius : 30mm  
 Storage, installation, operations temperature:  
 -40~+80°C

REV.	A		
SCALE	-		
<b>QSFP to SFP Optical Cable Assembly</b>			